


i-vac® 6

Modern vacuuming at its best



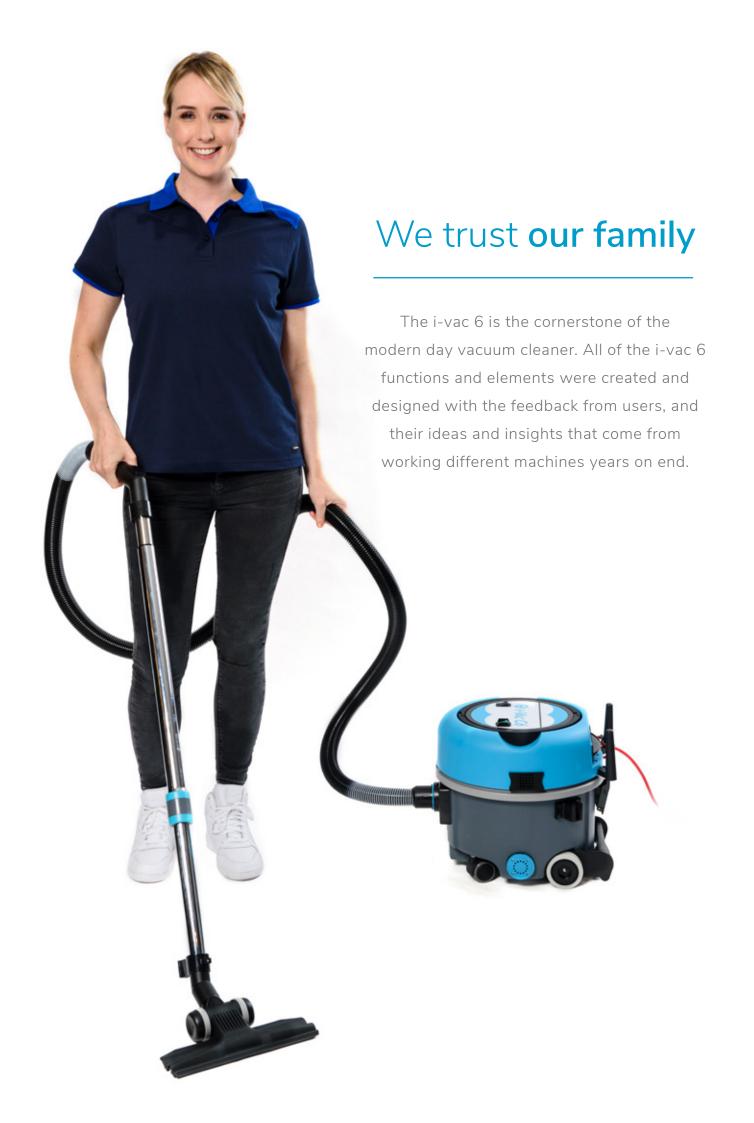

Resilient body

Non-breakable material and all attachments are assembled with screws, instead of rivets.

Parking position for safe working on stairs. The wheels are made of shock absorbing materials.



Key **features**



Whizzo

Patented Whizzo indicator. It makes a loud high tone when the bag is full or the vacuum is clogged.

Additionally, it supplies the motor with cooling air to avoid temperature peaks.

Office time cleaning

Choose between the high power or low decibel settings. Low power can be a real lifesaver for operational daytime cleaning in busy offices.



Floor tool

Flat nose tool without the need to adjust on different surfaces. Due to a very low profile, it can even reach underneath certain difficult areas. The flexible nylon material of the handle makes it robust and sturdy for the contract cleaning industry, especially combined with the detachable cable.



Fragrance cassette

Install a simple fragrance cassette inside the unit for a soothing, distinctive scent that fills the room with a pleasant aroma.



Technical specifications

Carry weight	6.8 kg
Weight with cable	7.8 kg
Net weight incl. packaging	10.8
Size body (I x w x h)	39 x 38 x 36 cm
Hose length	250 cm
Cable length	1500 cm
Capacity	6L
Diameter of tools	32 mm
Voltage	110 V, 115 V, 230 V, 240 V
Motor power	850 W
Sound level	62 dBA 58 dBA
Water lift/suction	2200 mm
Air flow	50 L/sec 52 L/sec
Wet/dry	Dry
Detachable cord	Yes
Material machine	PP



The filtration on this machine is upgradeable from standard, to HEPA, to ULPA

Ask for a la carte options. Available in private label for our customers in 20 and 100 batches. Customize your machinery with your own name and logo to project your company/industry image.



i-teamglobal.com